

# eCC2210/2210E



## Main Features

- OnBoard Intel® Atom™ Dual Core D2550 processor 1.86 GHz
- Intel® 82801JIR ICH10 RAID
- 1 x DVI-H & 1 x HDMI display output
- Dual Intel® 82574IT GbE LAN ports; Support WoL, teaming & PXE
- 6 x COM (2 x RS232/422/485 w/isolation protection)
- 4 x GPI & 4 x GPO
- 6 x USB2.0; 1 x external CFast socket; 1 x SIM card socket
- 1 x internal Mini-PCIe with two antenna holes
- Support +9V to +36VDC input; Support ATX power mode

## Product Overview

eCC2210/2210E powered by Intel® Atom™ Dual Core D2550 CPU with higher graphic and computing performance. With its outstanding performance, eCC2210/2210E can be utilized within industrial automation, self-service machines like KIOSK check-in machines, recycling machines as well as factory automation and etc. eCC2210/2210E support multiple I/O especially contains up to 6 x COM (2 x RS232/422/485 w/isolation protection) and 6 x USB2.0. Other than that, eCC2210/2210E has a wide DC input range from 9V to 36V, a wide operating temperature and a PCI or PCIe expansion; it is therefore designed to meet most application requirements.

## Specifications

### CPU Support

- OnBoard Intel® Atom™ Dual Core D2550 processor, 1.86GHz, 1M L2 cache
- Intel® 82801JIR ICH10 RAID

### Main Memory

- 2 x DDR3 so-dimm socket, support up to 4G DDR3/DDR3L 1066/1333/1600 SDRAM, with un-buffered and non-ECC
- Pre-install 4G Industrial Grade Memory as the manufacture configuration for shipment

### Dual Independent Display Option

- HDMI + VGA (1.8M cable, from DVI-H to VGA male type)
- HDMI + DVI-D (1.8M cable, from DVI-H to DVI-D male type)

### I/O Interface-Front

- ATX Power on/off switch
- HDD access/power status LEDs
- 2 x DB9, RS232/422/485 w/2.5KV isolation protection
- 2 x USB2.0
- 1 x DB15, 4 x GPI & 4 x GPO
- 1 x Mic-in & 1 x Line out
- SIM card socket
- CFast socket
- 2 x antenna holes

### I/O Interface-Rear

- 1 x 2-pin DC input, Support +9 to 36VDC input
- 1 x HDMI
- 1 x DVI-H
- Dual Intel® 82574IT GbE LAN ports; Support WoL, teaming and PXE
- 4 x USB2.0
- 2 x DB9, RS232/422/485
- 2 x DB9, RS232 only

### Device

- 1 x 2.5" SATA HDD driver bay
- 1 x External CFast socket
- 1 x External SIM card socket
- 1 x internal Mini-PCIe socket (Support optional Wi-Fi or 3.5G wireless module, jumper free)

### Expansion


- eCC2210: One PCI Expansion
  - Add-on card length: 176mm max.
  - Power consumption: 10W/slot max.
- eCC2210E: One PCIe4 Expansion (w/o Mini-PCIe device)
  - Add-on card length: 176mm max.
  - Power consumption: 10W/slot max.

\* Note: if Mini-PCIe device is installed, only supports PCIe1x1

### Power Requirements

- Support +9 to 36VDC input; Support ATX power mode

## Dimension Drawing

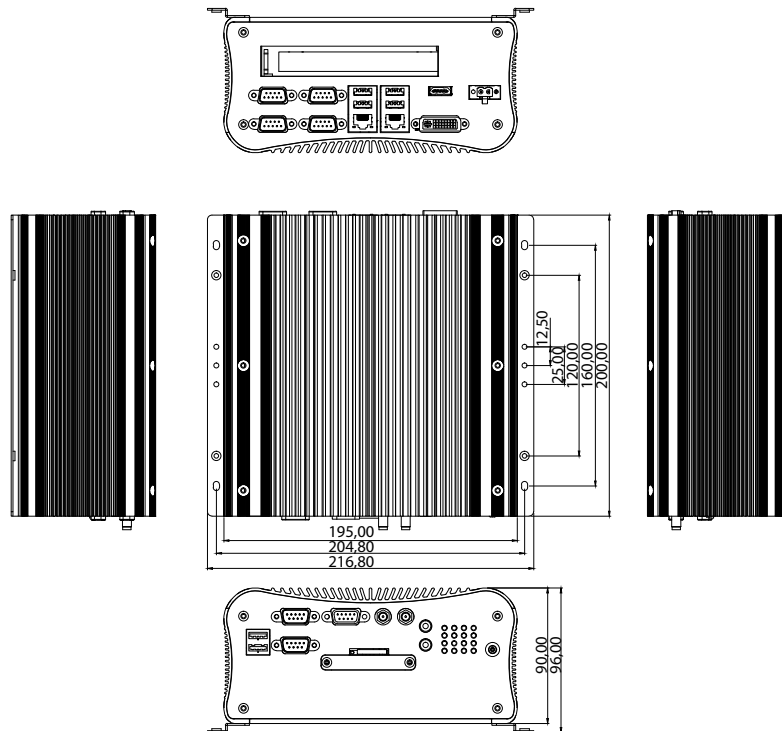

- Optional 19V, 65W power adapter

### Dimensions

- 195mm (W) x 200mm (D) x 90mm (H) (7.7" x 7.9" x 3,6")

### Construction

- Aluminum Chassis with fanless design

### Environment

- Operating temperature:
  - Ambient with air flow: -20°C to 65°C with industrial grade device
- Storage temperature: -30°C to 85°C
- Relative humidity: 10% to 93% (Non-condensing)
- Shock protection:
  - HDD: 20G, half sine, 11ms, IEC60068-2-27
  - CFast: 40G, half sine, 11ms, IEC60068-2-27
- Vibration protection w/HDD condition
  - Random: 0.5Grms @ 5~500 Hz according to IEC60068-2-64
  - Sinusoidal: 0.5Grms @ 5~500 Hz according to IEC60068-2-6

### Certifications

- CE approval

### OS Support List

- Windows XP 32bits
- Windows 7 32bits
- WinCE 7.0

## Ordering Information

- **eCC2210 (P/N: +70ECC2210)**  
Intel® Atom™ Dual Core D2550 fanless system with One PCI expansion
- **eCC2210E (P/N: +70ECC2210E)**  
Intel® Atom™ Dual Core D2550 fanless system with One PCIe4 expansion

Copyright 2014 Exor International S.p.A. – Verona, Italy

Subject to change without notice

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained in this documentation, it is provided "as is" without warranty of any kind.

www.exorint.net

# EXOR