

eXware703 Tech-Note

Edge Gateway/Controller, 4 GB Flash, 2x Ethernet

- Compatible with JMobile runtime. Supports JMobile protocols and gateway functions. JM4web HTML5 interface for web HMI.
- OPC UA server and client
- Compatible with CODESYS PLC V3 and network stacks.
- Compatible with Corvina Cloud secure remote connectivity.
- Plug-in module for system expansion.
- 2 Ethernet ports for network separation.
- Rugged all metal design.
- Wide operating temperature range.




Highlights

eXware703 is rugged and compact controller designed as a powerful IIoT Gateway. The product can integrate JMobile HMI with HTML interface and powerful gateway functions, IEC 61131 PLC with I/O expandability, Corvina Cloud secure remote connection. It is a powerful HMI without direct visualization. It is the ideal device to start building cloud edge solutions.


With the combination of JMobile HMI, CODESYS PLC and Corvina Cloud security, eXware offers companies the chance to start at an uncomplicated level in IoT and yet allows enormous future expansion into more complex aspects of Industry 4.0. Speaking across the vast library of JMobile protocols as well as OPC UA to higher enterprise level control, the eXware is a true Plug and Use product. Straightforward wireless connectivity using the optional PLCM09 2G/3G modem.

- Compatible with Existing Installations
- Compatible with JMobile. Includes JM4web HTML5 access
- Supports JMobile protocols including OPC UA server and client
- Compatible with CODESYS V3. Supports network stacks PROFINET, EtherNet/IP, EtherCAT, POWERLINK, Modbus, and local I/O expandability
- Ready for Corvina Cloud secure remote connectivity
- Compatible with PLCM09 2G/3G modem
- 2 Ethernet ports for network separation WAN/LAN
- System settings by web browser
- Linux-based open platform


eXware703 - Technical Data



System Resources	
CPU	32-bit RISC single core - 1 GHz
Operating System	Linux RT
Flash	4 GB
RAM	512 MB
Real Time Clock, RTC Back-up, Buzzer	Yes
Interface	
Ethernet port	2 (port 0 - 10/100, port 1 - 10/100)
USB port	1 (Host v. 2.0, max. 500 mA)
Serial port	1 (RS-232, RS-485, RS-422, software configurable) Max 2 serial ports using plug-in modules.
SD card	Yes
Expansion	1 slot for plug-in modules
Ratings	
Power supply	24 Vdc (10 to 32 Vdc)
Current Consumption	0.35 A max. at 24 Vdc
Input Protection	Electronic
Battery	Yes
Environment Conditions	
Operating Temp	-20°C to +60°C - Plug-in modules and USB devices may limit max temperature to +50 °C.
Storage Temp	-20°C to +70°C
Operating / Storage Humidity	5 - 85% RH, non condensing
Protection Class	IP20
Dimensions and Weights	
Faceplate LxH	45x134 mm (1.77x5.27")
Depth D	102 mm (4.01")
Weight	0.6 Kg
Mounting	DIN Rail (TS35)
Approvals	
CE	Electromagnetic Compatibility Directive 2014/30/EU (EMC)
ATEX	Zone 2: II 3 G Ex ec IIC T5...T4 Gc -20°C ≤ Tamb ≤ +60°C or 0°C ≤ Tamb ≤ +50°C
IECEX	Zone 2: Ex ec IIC T5...T4 Gc -20°C ≤ Tamb ≤ +60°C or 0°C ≤ Tamb ≤ +50°C
UL	cULus: UL61010-1 / UL61010-2-201
UL	cULus: Class 1 Div 2
DNV-GL	Yes
RCM	Yes

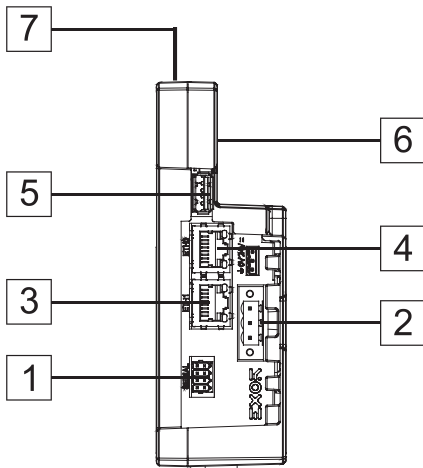

- | | |
|-------------------------------|---------------------------------------|
| 1 Serial port | 5 USB port 1 |
| 2 Power supply | 6 Expansion slots for plug-in modules |
| 3 Ethernet port 1 (10/100 Mb) | 7 SD Card slot |
| 4 Ethernet port 0 (10/100 Mb) | |

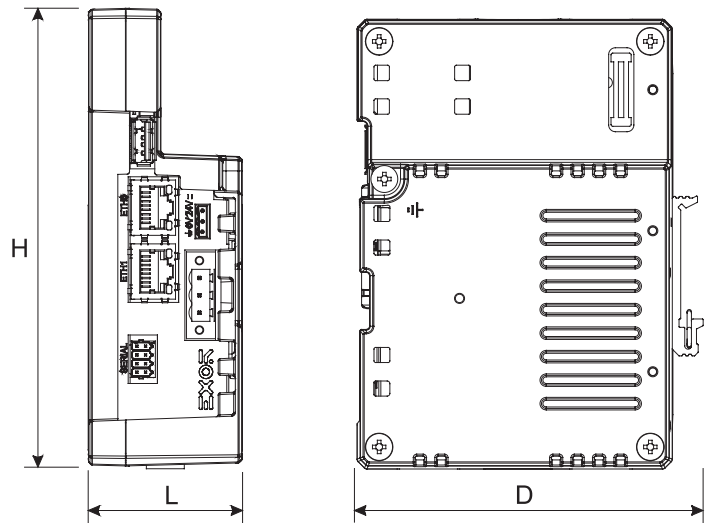

Ordering Information

Model	Part Number	Description
eXware 703	+EXW703U0P1	Edge Gateway/Controller, 4GB Flash memory, 2x Ethernet, JMobile runtime